


System cable CAPDIS-M_4

Connecting line between CAPDIS-M and CAPDIS-4

The system cable connects the CAPDIS-M with the CAPDIS-4. The CAPDIS-M is plugged onto an existing CAPDIS-Sx or CAPDIS-PI and acquires and calibrates the voltages at the capacitive measuring point and then provides these to the CAPDIS-4 for amplification. The system cable is available for different applications and in different lengths. It is specially pre-assembled for CAPDIS-4 and CAPDIS-M.

Flat ribbon cable to easier installation

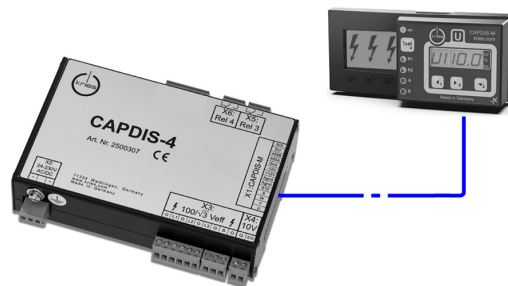

Versions

Item number	Description
2500274	System cable CAPDIS-M to CAPDIS-4, 3m
2500274_0,3M	System cable CAPDIS-M to CAPDIS-4, 0.3 m
2500274_5.5M	System cable CAPDIS-M to CAPDIS-4, 5.5 m
2500274_8M	System cable CAPDIS-M to CAPDIS-4, 8 m
2500274_H001	System cable CAPDIS-M to CAPDIS-4, 3 m, with heat shrink tube
2500365	System cable CAPDIS-M to CAPDIS-4, 1.5 m, flat ribbon cable
2500405	System cable CAPDIS-M to CAPDIS-4, 0.3 m, flat ribbon cable
2501228	System cable CAPDIS-M to CAPDIS-4, 3 m, for SxR4
2502329	System cable CAPDIS-M to CAPDIS-4, 1.5 m, for SxR4

Technical Data

General data

Article number	2500405
Product designation	System cable CAPDIS-M to CAPDIS-4, 0.3 m, flat ribbon cable

Dimensions and type of installation

Total length L	300 mm
----------------	--------



Kries Energietechnik GmbH & Co. KG

Sandwiesenstr. 19 | D-71334 Waiblingen

kries.com | sales.kries@te.com | (+)49-7151-7074-860

© Kries Energietechnik GmbH & Co. KG | Subject to modifications.

22.08.24

Page 1/1