
Connection cable voltage

For devices of the IKI series and ohmic sensors

This connection cable can be used to connect devices of the IKI-50 series to sensors (For the connection to the ohmic sensor, a coaxial cable set is additionally required).



Features

For connection of IKI devices to CAPDIS via loop-in on the blade terminals (If the capacitive tap on the CAPDIS is connected via the blade terminals and there is no system connector on the CAPDIS).

Versions

| Item number | Description |
|--------------|---|
| 2500487 | Y-cable IKI to CAPDIS 0.4 m 2 x Sx blade plug to system plug |
| 2500487_H002 | Y-cable IKI to CAPDIS 0.4 m 2 x Sx blade plug to system plug, decoupled |
| 2500493 | Y-cable IKI to CAPDIS 1.5 m 2 x Sx blade plug to system plug |
| 2500493_H002 | Y-cable IKI to CAPDIS 1.5 m 2 x Sx blade plug to system plug, decoupled |
| 2500523 | Y-cable IKI to CAPDIS 3 m 2 x Sx blade plug to system plug |
| 2500523_H002 | Y-cable IKI to CAPDIS 3 m 2 x Sx blade plug to system plug, decoupled |
| 2500619 | Y-cable IKI to CAPDIS 6 m 2 x Sx blade plug to system plug |
| 2500619_H002 | Y-cable IKI to CAPDIS 6 m 2 x Sx blade plug to system plug, decoupled |
| 2500620 | Y-cable IKI to CAPDIS 10 m 2 x Sx blade plug to system plug |
| 2500620_H002 | Y-cable IKI to CAPDIS 10 m 2 x Sx blade plug to system plug, decoupled |

Technical Data

General data

| Article number | 2500523 |
|---------------------|--|
| Quantity unit | Piece |
| Product designation | Y-cable IKI to CAPDIS 3 m 2 x Sx blade plug to system plug |




Connection cable voltage

For devices of the IKI series and ohmic sensors

| More | tec | hnical | data |
|------|-----|--------|------|
| | | | |

| Decoupling capacitor | - |
|-------------------------------------|---|
| Usable with | IKI-22, IKI-23, IKI-50 |
| Version cable | Screened connecting wire |
| Dimensions and type of installation | |
| Total length L | 3 m |
| Operating conditions | |
| Operating temperature | -25°C 55°C |
| Storage temperature | -30°C 75°C |
| Connection to CAPDIS | Flat receptacles 4.8 mm x 0.8 mm with insulating sleeve |
| Connection to IKI | Micro Mate-N-Lok plug |
| | |

Drawing

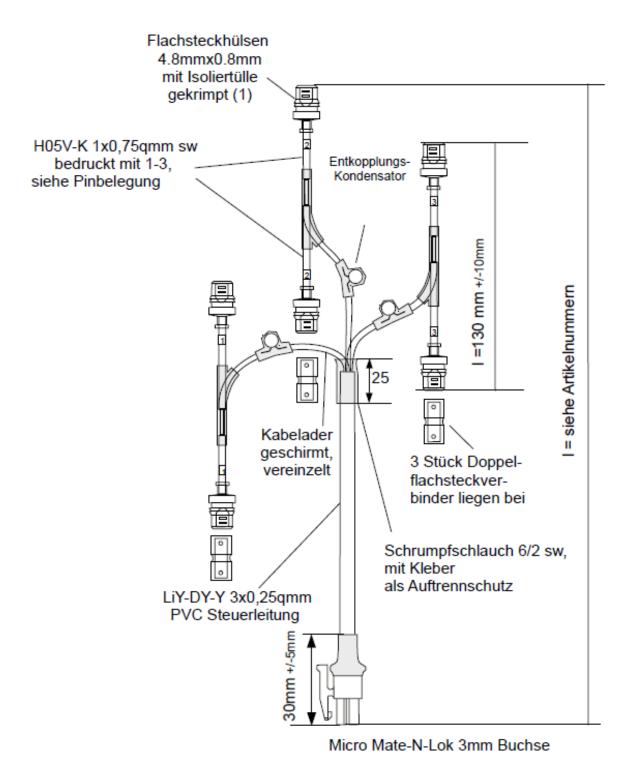

Kries-Energietechnik GmbH & Co. KG
Sandwiesenstr. 19 | D-71334 Waiblingen
kries.com | service@kries.com | +49 7151 96932 0