


# Connection cable voltage

For devices of the IKI series and ohmic sensors

This connection cable can be used to connect devices of the IKI-50 series to sensors (For the connection to the ohmic sensor, a coaxial cable set is additionally required).

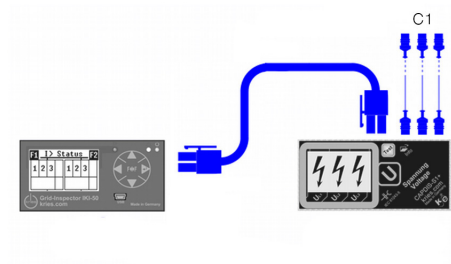

## Features

For connection of IKI devices to CAPDIS via the system connector (If the capacitive tap is connected to the CAPDIS via the spade terminals).The cable is decoupled via a capacitance to prevent influencing the voltage indication in the event of a fault in the connecting cable.

## Versions

Item number	Description
2500484	Y-cable IKI to CAPDIS   0.4 m   2 x system plug
2500484_H001	Y-cable IKI to CAPDIS   0.4 m   2 x system plug   2 x 90° tilted
2500484_H002	Y-cable IKI to CAPDIS   0.4 m   2 x system plug, decoupled
2500484_H003	Y-cable IKI to CAPDIS   0.4 m   2 x system plug, decoupled
2500484_H025	Y-cable IKI to CAPDIS   0.25 m   2 x system plug, decoupled
2500621	Y-cable IKI to CAPDIS   1.5 m   2 x system plug
2500621_H001	Y-cable IKI to CAPDIS   1.5 m   2 x system plug
2500621_H002	Y-cable IKI to CAPDIS   1.5 m   2 x system plug, decoupled
2500621_H003	Y-cable IKI to CAPDIS   1.5 m   2 x system plug, decoupled
2500622	Y-cable IKI to CAPDIS   3 m   2 x system plug
2500622_H002	Y-cable IKI to CAPDIS   3 m   2 x system plug, decoupled
2500622_H006	Y-cable IKI to CAPDIS   6 m   2 x system plug
2500622_H015	Y-cable IKI to CAPDIS   6 m   2 x system plug

## Technical Data

### General data

Article number 2500621\_H003



**Kries-Energietechnik GmbH & Co. KG**  
Sandwiesenstr. 19 | D-71334 Waiblingen  
kries.com | service@kries.com | +49 7151 96932 0

© Kries-Energietechnik GmbH & Co. KG | Subject to modifications.

28.07.23

Page 1/3

# Connection cable voltage

For devices of the IKI series and ohmic sensors

## General data

Quantity unit	Piece
Product designation	Y-cable IKI to CAPDIS   1.5 m   2 x system plug, decoupled

## More technical data

Decoupling capacitor	✓
Usable with	IKI-22, IKI-23, IKI-50
Version cable	Screened connecting wire

## Dimensions and type of installation

Total length L	2 m
----------------	-----

## Operating conditions

Operating temperature	-25°C ... 55°C
Storage temperature	-30°C ... 75°C

Connection to CAPDIS	Mini Mate-N-Lok plug
Connection to IKI	Micro Mate-N-Lok plug



# Connection cable voltage

For devices of the IKI series and ohmic sensors

## Drawing

