


Connection cable voltage

For devices of the IKI series and ohmic sensors

This connection cable can be used to connect devices of the IKI-50 series to sensors (For the connection to the ohmic sensor, a coaxial cable set is additionally required).

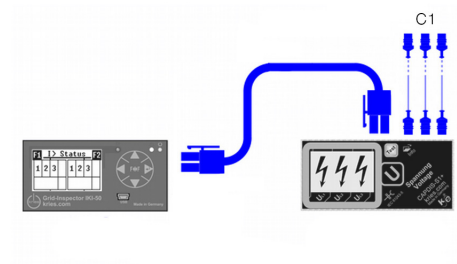

Features

For connection of IKI devices to CAPDIS via the system connector (If the capacitive tap is connected to the CAPDIS via the spade terminals).

Versions

| Item number | Description |
|--------------|--|
| 2500484 | Y-cable IKI to CAPDIS 0.4 m 2 x system plug |
| 2500484_H001 | Y-cable IKI to CAPDIS 0.4 m 2 x system plug 2 x 90° tilted |
| 2500484_H002 | Y-cable IKI to CAPDIS 0.4 m 2 x system plug, decoupled |
| 2500484_H003 | Y-cable IKI to CAPDIS 0.4 m 2 x system plug, decoupled |
| 2500484_H025 | Y-cable IKI to CAPDIS 0.25 m 2 x system plug, decoupled |
| 2500621 | Y-cable IKI to CAPDIS 1.5 m 2 x system plug |
| 2500621_H001 | Y-cable IKI to CAPDIS 1.5 m 2 x system plug |
| 2500621_H002 | Y-cable IKI to CAPDIS 1.5 m 2 x system plug, decoupled |
| 2500621_H003 | Y-cable IKI to CAPDIS 1.5 m 2 x system plug, decoupled |
| 2500622 | Y-cable IKI to CAPDIS 3 m 2 x system plug |
| 2500622_H002 | Y-cable IKI to CAPDIS 3 m 2 x system plug, decoupled |
| 2500622_H006 | Y-cable IKI to CAPDIS 6 m 2 x system plug |
| 2500622_H015 | Y-cable IKI to CAPDIS 6 m 2 x system plug |

Technical Data

General data

Article number 2500622_H006



Kries Energietechnik GmbH & Co. KG

Sandwiesenstr. 19 | D-71334 Waiblingen

kries.com | sales.kries@te.com | (+)49-7151-7074-860

22.08.24

Page 1/3

Connection cable voltage

For devices of the IKI series and ohmic sensors

General data

| | |
|---------------------|---|
| Quantity unit | Piece |
| Product designation | Y-cable IKI to CAPDIS 6 m 2 x system plug |

More technical data

| | |
|----------------------|--------------------------|
| Decoupling capacitor | - |
| Usable with | IKI-22, IKI-23, IKI-50 |
| Version cable | Screened connecting wire |

Dimensions and type of installation

| | |
|----------------|-----|
| Total length L | 6 m |
|----------------|-----|

Operating conditions

| | |
|-----------------------|----------------|
| Operating temperature | -25°C ... 55°C |
| Storage temperature | -30°C ... 75°C |

| | |
|----------------------|-----------------------|
| Connection to CAPDIS | Mini Mate-N-Lok plug |
| Connection to IKI | Micro Mate-N-Lok plug |

Connection cable voltage

For devices of the IKI series and ohmic sensors

Drawing

