


# CAPDIS universal adapter retrofit

For easy retrofitting capacitive interfaces

The universal adapter is used to retrofit a CAPDIS voltage test system to HR or LRM interfaces. The CAPDIS can be placed freely on the plant front thanks to the magnetic holders. It can be used especially in confined spaces. The adapter consists of a holding frame for the CAPDIS, a cable set and the magnetic holders. In addition to the universal adapter, a CAPDIS-Sx is required.

This variant can be plugged directly onto the interface.

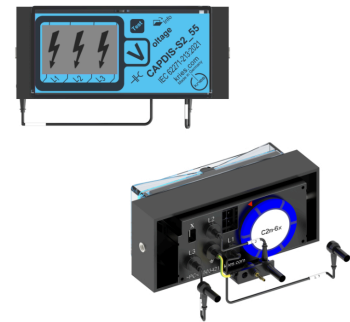

## Technical Data

### General data

Article number	2502343_H002
Quantity unit	Set
Product designation	CAPDIS Universal adapter retrofit, pluggable
Scope of delivery	Holder and cable set. CAPDIS-Sx needs to be ordered seperately.
Usable with	CAPDIS-Sx+ (R4.5), CAPDIS-Sx_55 (R4.5), CAPDIS-Sx_55 (R5), CAPDIS-Sx_HV (R4.5), CAPDIS-Sx_HV (R5)

### Dimensions and type of installation

Mounting	Plugged directly onto the interface.
----------	--------------------------------------

### Operating conditions

Operating temperature	-25°C ... 55°C
Storage temperature	-30°C ... 75°C



**Kries Energietechnik GmbH & Co. KG**

Sandwiesenstr. 19 | D-71334 Waiblingen

kries.com | sales.kries@te.com | (+)49-7151-7074-860

28.08.24

Page 1/1