


Connection cable voltage

For devices of the IKI series and ohmic sensors

This connection cable can be used to connect devices of the IKI-50 series to sensors (For the connection to the ohmic sensor, a coaxial cable set is additionally required).

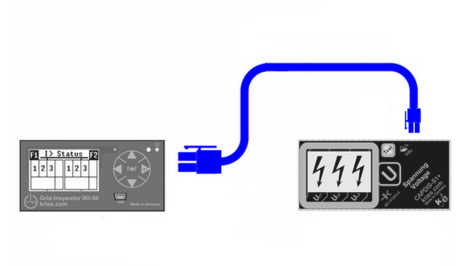

Features

For connecting IKI devices to CAPDIS-PI (angled system connector)

Versions

| Item number | Description |
|--------------|---|
| 2500511 | Y-cable IKI to CAPDIS-PI-RR4 1.5 m 2 x system plug |
| 2500511_H002 | Y-cable IKI to CAPDIS-PI-RR4 1.5 m 2 x system plug, decoupled |
| 2500512 | Y-cable IKI to CAPDIS-PI-RR4 3 m 2 x system plug |
| 2500512_H002 | Y-cable IKI to CAPDIS-PI-RR4 3 m 2 x system plug, decoupled |
| 2500513 | Y-cable IKI to CAPDIS-PI-RR4 10 m 2 x system plug |
| 2500513_H002 | Y-cable IKI to CAPDIS-PI-RR4 10 m 2 x system plug, decoupled |
| 2500522 | Y-cable IKI to CAPDIS-PI-RR4 0.5 m 2 x system plug |
| 2500522_H002 | Y-cable IKI to CAPDIS-PI-RR4 0.5 m 2 x system plug, decoupled |
| 2501288 | Y-cable IKI to CAPDIS-PI-RR4 1.5 m 2 x system plug |
| 2501289 | Y-cable IKI to CAPDIS-PI-RR4 0.3 m 2 x system plug |
| 2501293 | Y-cable IKI to CAPDIS-PI-RR4 3 m 2 x system plug |
| 2502096 | Y-cable adapter Sx to PI |
| 2509384 | Y-cable IKI to CAPDIS-PI-RR4 6 m 2 x system plug |
| 2509384_H002 | Y-cable IKI to CAPDIS-PI-RR4 6 m 2 x system plug, decoupled |

Technical Data

General data

Article number 2509384_H002



Kries-Engiertechnik GmbH & Co. KG
Sandwiesenstr. 19 | D-71334 Waiblingen
kries.com | service@kries.com | +49 7151 96932 0

© Kries-Engiertechnik GmbH & Co. KG | Subject to modifications.

28.07.23
Page 1/3

Connection cable voltage

For devices of the IKI series and ohmic sensors

General data

| | |
|---------------------|---|
| Quantity unit | Piece |
| Product designation | Y-cable IKI to CAPDIS-PI-RR4 6 m 2 x system plug, decoupled |

More technical data

| | |
|----------------------|--------------------------|
| Decoupling capacitor | ✓ |
| Usable with | IKI-22, IKI-23, IKI-50 |
| Version cable | Screened connecting wire |

Dimensions and type of installation

| | |
|----------------|-----|
| Total length L | 6 m |
|----------------|-----|

Operating conditions

| | |
|-----------------------|----------------|
| Operating temperature | -25°C ... 55°C |
| Storage temperature | -30°C ... 75°C |

| | |
|----------------------|-----------------------|
| Connection to CAPDIS | Micro Mate-N-Lok plug |
| Connection to IKI | Micro Mate-N-Lok plug |



Connection cable voltage

For devices of the IKI series and ohmic sensors

Drawing

