


# Connection cable resistive sensors

## Coax cable set RG62

The coaxial cable set is used to connect devices of the IKI series to resistive sensors. The cables are available in different lengths. A set consists of three single cables each with the imprint L1, L2, L3. For connection to an IKI, an additional adapter or connecting cable is required.

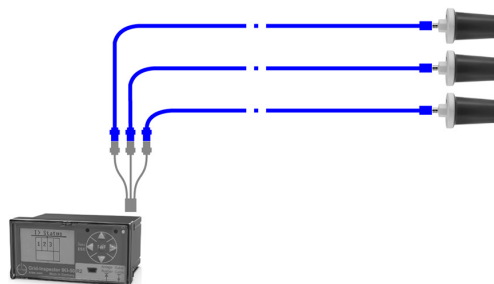

## Versions

Item number	Description
2509392	Coaxial cable   RG62   l=2m   BNC-plug
2509395	Coaxial cable   RG62   l=6m   BNC-plug

## Technical Data

### General data

Article number	2509395
Product designation	Coaxial cable   RG62   l=6m   BNC-plug
Usable with	IKI-50, IKI-55, CAPDIS-4o

### Dimensions and type of installation

Total length L	6 m
----------------	-----

### Operating conditions

Operating temperature	-25°C ... 55°C
Storage temperature	-30°C ... 75°C
Protection class	IP54
Rated frequency	50 Hz, 60 Hz



# Connection cable resistive sensors

Coax cable set RG62

## Accessories

Article number	Product designation
2500486_H001	Connecting cable IKI-OAS; length = 400 mm flat plug - system plug Double flat plug sleeve

